Halsey Taylor®
Satisfying Thirsts Since 1912

HDFFBLREBP
Heavy Duty Bi-Level Fountain with Back Panel
Contour™ Barrier-Free

Rated for Indoor /Outdoor Use

BUILT IN USA OF DOMESTIC AND FOREIGN PARTS

Model HDFFBLREBP

Standard Finish is Stainless Steel

Optional Accessories (extra cost):
- *Cane Apron (HDFCANE)*
- *1500 Gal Filter (2 recommended) (HWF172) - Indoor installation only*

Each HDFFBLREBP consists of 1 carton of the following:
- *Fountain*
- *Panel*
- *Misc. Parts*

GENERAL
Two face-mounted 14 gauge heavy duty fountains, one-piece, non-corrosive stainless steel type 300 series with brushed satin finish and one piece vandal resistant drain. Larger seamless drawn contour-formed basins with softly rounded corners and edges reduce splatter, insures proper drainage and prevents standing waste water. Designed to be easily accessible to both physically challenged and able-bodied individuals. Ideally suited for installation in public areas. When properly installed, model meets state and federal requirements as defined by the Americans with Disabilities Act.

BUBBLER
Vandal resistant bubbler is one-piece, heavy-duty construction with integral hood guard design to prevent contamination from other users, airborn deposits and tampering.

PUSHBUTTON ACTUATION MECHANISM
Self-closing, vandal-resistant pushbutton does not require grasping or twisting.

PANELS
Back panel constructed of stainless steel, type 300 series with satin finish. Solid 14 gauge heavy duty stainless steel underplate and vandal resistant pinned torx screws. 1/4" thick heavy duty stainless steel mounting backplate on fountain arm.

AUTOMATIC STREAM HEIGHT REGULATOR
Self-closing assembly is located inside unit to prevent tampering. Unit resists corrosion and liming. A constant stream height is automatically maintained under line pressures that vary from 20 to 105 psi.

INLET STRAINER
Easily cleaned in-line strainer screen traps particles of 140 microns or larger before they enter the waterway.

WATER INLET - 3/8" O.D. Tubing. **DRAIN OUTLET -** 1-1/4" tube outlet for 1-1/4" slip joint connection. **Trap and Service stop not included.**

SUGGESTED SPECIFICATIONS
Both fountains shall include pushbutton on the front. Both shall include contour-formed basins to eliminate splashing and standing water, and shall have rounded corners and edges. Each bubbler shall be one-piece, heavy-duty, vandal-resistant type with integral hood guard and anti-squirt feature. Fountain shall comply with ANSI 117:1 and ADA for visual and motion disabilities. The manufacturer shall certify the unit to meet the requirements of NSF/ANSI 61, and the Safe Drinking Water Act.

CAPACITIES CHART

Model	Order ID	Approx. Ship Wt.	ADA Compliant	NSF/ANSI 61 Certified
HDFFBLREBP	7439005R83	50 lbs.	•	•

NOTE: Continued product improvement makes specification sheets subject to change without notice.

HDFFBLREBP
Heavy Duty Bi-Level Fountain with Back Panel

Halsey Taylor®
Satisfying Thirsts Since 1912

Contour™ Barrier-Free

Rated for Indoor/Outdoor Use

(CONTINUED)

MOUNTING INSTRUCTIONS
Refer to diagrams for rough-in of plumbing. Mount wall plate assembly to wall per the installation instructions. Hang fountain panel over the wall plate assembly. Attach fountains to wall plate assembly. Water service line and waste line are to be assembled as required. Final check for leaks and correct functions of fountain should be made. (For more details, see the installation instructions.)

CAUTION - Fountain must be securely bolted to wall.

OPERATING PRESSURES
Supply water 20 - 105 psi maximum

A service supply stop must be installed at the fountain inlet line. Service stop not included.

Note: For wall support required locations see installation instructions provided with panel and fountains.



WALL LAYOUT

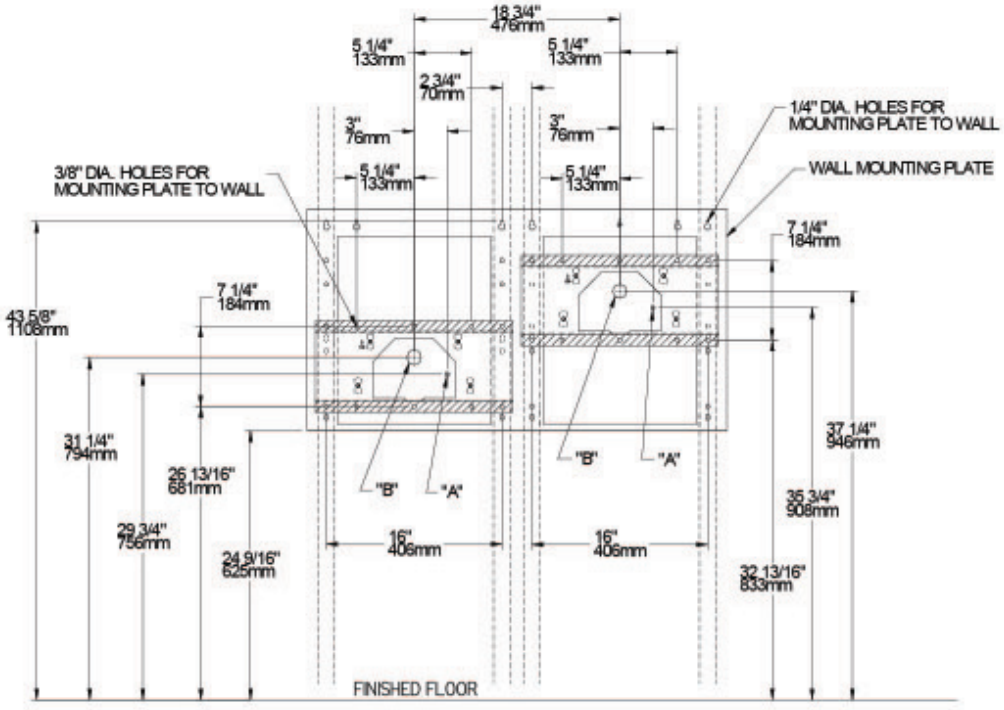

SIDE VIEW

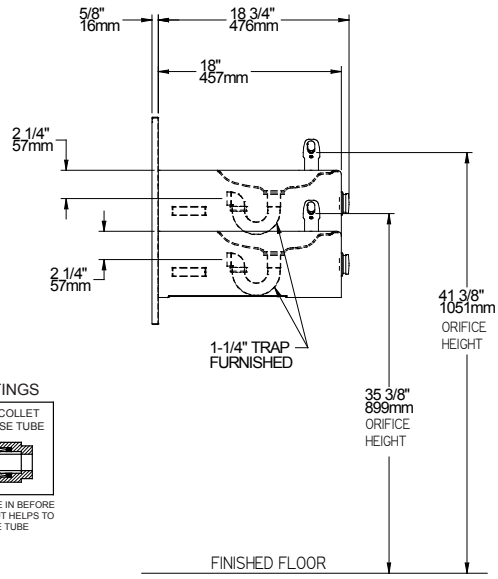

FRONT VIEW

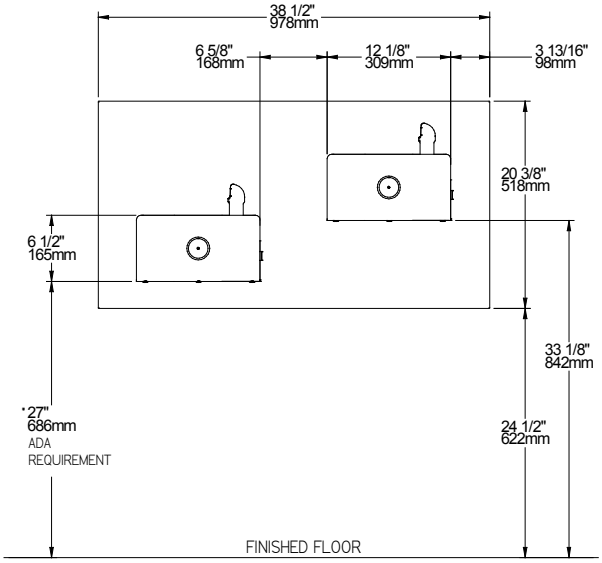

OPERATION OF QUICK CONNECT FITTINGS

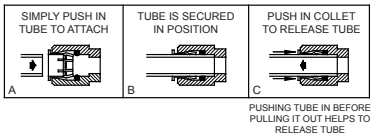

A = Recommended water supply location 3/8" O.D. unplated copper tube connect, stubbed 1-1/2" (38mm) from the wall. Shut off by others.
B = Recommended location for waste outlet 1-1/4" O.D. drain, stubbed 6-5/8" (168mm) from the wall
NOTE: Reinforce the wall in the shaded areas.

* Adult ADA Requirement.
*24" (610mm) for Child ADA, adjust other measurements accordingly.

Job Name: _____

Model: _____ Qty. _____

Contact: _____

Approval Signature: _____

Notes:

Halsey Taylor®

Printed in the U.S.A.